


2001™ Series

Heavy Duty Food Grade Polyurethane Lined Material Handling Hose With Grounding Wire

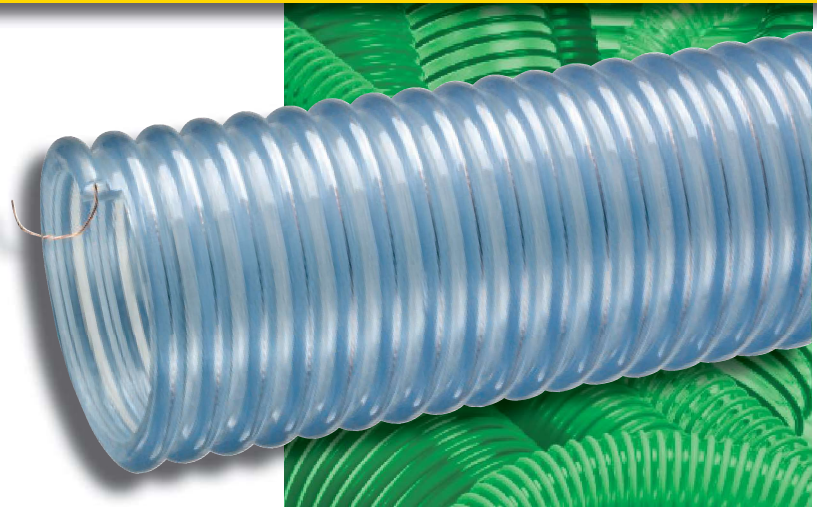

General Applications:

- Food grade material handling – heavy duty abrasive
- Material handling – heavy duty abrasive
- Pharmaceutical product transfer
- Plastic processing equipment
- Pneumatic conveying equipment

Construction: PVC cover with polyurethane liner, rigid PVC helix and grounding wire.



Service Temperature Range:

-4°F (-20°C) to +150°F (+65°C)*

Features and Advantages:

- **Extra Thick Abrasion Resistant Polyurethane Liner** – Designed for dry applications where severe abrasion is a factor. Provides for longer hose life and lower operating costs versus rubber or PVC hoses.
- **Food Grade Materials** – Hose cover complies with applicable FDA⁽⁰³⁾ requirements. Hose liner complies with applicable FDA⁽⁰⁴⁾ requirements. Hose approved by USDA⁽¹²⁾ for use in meat and poultry plants.
- **Phthalate Free**
- **Grounding Wire** – Multi-strand wire helps prevent the build-up of static electricity for added safety and to help keep material flowing smoothly. It's embedded within the rigid helix to prevent contamination of transferred materials.
- **Transparent Construction** – “See-the-flow.” Allows for visual confirmation of material flow.
- **Convuluted Outer Cover** – Provides increased hose flexibility.
- **Oil Resistant Polyurethane Liner** – Resists most animal and petroleum based oils.

Nominal Specifications

Series Number	ID		OD		Working Pressure (psi)		Vacuum Rating Hg (in)		Min. Bending Radius at 68°F (in)	Standard Length (ft)	Weight (lbs/ft)
	(in)	(mm)	(in)	(mm)	68°F	104°F	68°F	104°F			
2001-150	1-1/2	38.1	1.88	47.8	50	25	Full	28	6	60	0.48
2001-200	2	50.8	2.44	62.0	40	20	Full	28	7	60	0.67
2001-250	2-1/2	63.5	3.12	77.2	40	20	Full	28	8	60	0.92
2001-300	3	76.2	3.70	94.1	40	20	Full	28	9	60	1.35
2001-400	4	101.6	4.80	122.0	35	18	Full	28	15	60/20	2.17
2001-500	5	127.0	5.81	147.6	35	18	28	25	23	60/20	2.77
2001-600	6	152.4	6.93	176.0	30	15	28	25	26	60/20	3.90
2001-700	7	178.8	8.08	205.2	30	15	28	25	30	60/20	5.20
2001-800	8	203.2	9.28	235.8	30	15	28	25	36	20	6.65

NOTE: Service life may vary depending on operating conditions and type of material being conveyed.

NOTE: For details of the following compliances, refer to footnotes listed on page 63.

*Actual service temperature range is application dependent.

CAUTION: This product is designed to dissipate static electricity when the embedded grounding wire is physically extracted and securely connected to ground, through the fitting or by other means.

BSE/TSE⁽⁰²⁾, FDA⁽⁰³⁾, FDA⁽⁰⁴⁾, PHTHALATE FREE⁽¹⁰⁾, RoHS⁽¹¹⁾, USDA⁽¹²⁾

Because



eMail: Sales@MurdockIndustrial.com

Website: www.HoseWarehouse.com

USA & International Wholesale

Phone: 330-535-7105 Fax: 330-535-1125

ice.

519